



# Ranger™ Series

Compact Industrial Bench Scales



## **Precise, Fast Industrial Bench Scales in Rugged Cast Aluminum Housings**

The OHAUS Ranger™ line of compact bench scales has been upgraded and expanded with new software and models for even better performance in demanding industrial applications. The Ranger line now has an enhanced microprocessor and updated filtering software for improved performance in the lab, on the production line, or in the field.

Every Ranger features a large, backlit LCD display with fast display of weighing results within 2 seconds, as well as an RS232 port for quick connectivity to printers and systems. For use in applications requiring additional filtering, the Ranger series now includes dynamic weighing software allowing weigh determination where vibration is an issue.

Every Ranger is designed with OHAUS' easy-to-use software interface, making operation intuitive with a consistent feel across all four Ranger lines: Ranger, Ranger High Resolution, Ranger Count and Ranger Count Plus. No matter the industrial need, there is a Ranger for that application!

### **Standard Features Include:**

- High performance strain gauge loadcells, encased in a tough painted cast aluminum housing
- Wide range of platforms and capacities from 6lb to 120lb
- Weigh in lb, oz, kg, g or metric tonne units
- Large, backlit LCD display
- Dynamic weighing software included
- 1:30,000 default resolution
- NTEP 1:6,000 legal for trade resolution
- RS232 interface included
- Built-in AC with hardwired plug, factory-installed NiMH battery optional

# Ranger™ Series Compact Bench Scales

## Specifications

Model	RD3RS	RD6RS	RD12LS	RD30LS	RD60LS
Default Capacity x Readability	6.6138 x 0.0002 lb 105.822 x 0.002 oz 3 x 0.0001 kg 3000 x 0.1 g 0.003 x 0.000001 t	13.2275 x 0.0005 lb 211.640 x 0.005 oz 6 x 0.0002 kg 6,000 x 0.2 g 0.006 x 0.000001 t	26.456 x 0.001 lb 423.30 x 0.02 oz 12 x 0.0005 kg 12,000 x 0.5 g 0.012 x 0.000001 t	66.138 x 0.002 lb 1,058.20 x 0.02 oz 30 x 0.001 kg 30,000 x 1 g 0.03 x 0.000001 t	132.275 x 0.005 lb 2116.50 x 0.05 oz 60 x 0.002 kg 60,000 x 2 g 0.06 x 0.000002 t
NTEP Certified Capacity x Readability	6 x 0.001 lb 3 x 0.0005 kg 3,000.0 x 0.5 g	12 x 0.002 lb 6 x 0.001 kg 6,000 x 1 g	24 x 0.005 lb 12 x 0.002 kg 12,000 x 2 g	60 x 0.01 lb 30 x 0.005 kg 30,000 x 5 g	120 x 0.02 lb 60 x 0.01 kg 60,000 x 10g
Scale with NiMH Internal Battery	RD3RS/1	RD6RS/1	RD12LS/1	RD30LS/1	RD60LS/1
Platform Size (w x d)	9.5 x 8 in / 24 x 20 cm		13.8 x 9.5 in / 35 x 24 cm		
Safe Overload Capacity	150% of capacity				
Construction	Stainless steel weighing pan / Painted cast-aluminum housing				
Protection	IP43				
Weighing Units / Modes	lb, oz, g, kg / Weighing, Dynamic Weighing				
Display	0.63 inch / 16 mm digit height (backlit LCD)				
Keyboard	Six button membrane switch				
Stabilization Time	< 2 seconds				
Auto Zero Tracking	0.5, 1, 2, 5, 10d, OFF				
Power	Internal AC adapter, rechargeable NiMH battery optional				
Calibration	External span, 20 - 100%				
Operating Temperature	14° F to 104° F / - 10° C to 40° C				
Net (Shipping) Weight	12 lb / 5.1 kg (15 lb / 6.6 kg)		20 lb / 8.9 kg (25 lb / 11.1 kg)		
Scale Dimensions (W x D x H)	10.5 x 13.2 x 4 in / 26.5 x 33.5 x 10 cm		14.2 x 14.6 x 4.5 in / 36 x 37 x 11.5 cm		
Shipping Dimensions (W x D x H)	16.5 x 19 x 10 in / 42 x 48 x 25 cm		20 x 20.5 x 10.5 in / 52 x 53 x 27 cm		

## Standard Features

RS232 bi-directional interface, backlit LCD display, auto-off timer, internal AC power supply, leveling feet, leveling bubble, loop for security device, 6-key membrane keypad, rugged cast aluminum housing, auto zero tracking, retain zero data during power off, user selectable graduation, user selectable averaging and level sensitivity, display units user selectable, automatic taring, configurable RS232 port settings with programmable output header, supervisor lockout capability.


## Factory Options and Accessories

Internal NiMH rechargeable battery, protective in-use cover, carrying case, anti-theft device, RS232 cables.

## Compliance

- **Electrical/Emissions:** CE listed, meets AS/NZS4251.1 Emission/AS/NZS4252.1 Immunity, FCC Class B Part 15 operation, Industry Canada Class A. cULus AC power pack. Compliant to Directive 2002/96/EC on waste electrical and electronic equipment (WEEE).
- **Legal-for-Trade:** NTEP Certified (certificate #07-026, Class III), OIML R76 Class III and EC Type Approved
- **Quality:** Ohaus quality management system registered to ISO 9001:2008

## Outline Dimensions

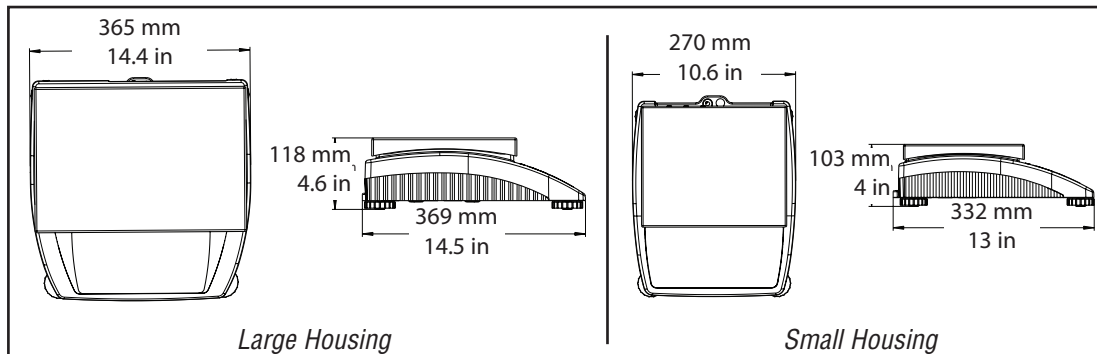

## OHAUS CORPORATION

\* 7 Campus Drive  
Suite 310  
Parsippany, NJ 07054 USA

Tel: 800.672.7722  
973.377.9000  
Fax: 973.944.7177

[www.ohaus.com](http://www.ohaus.com)

With offices throughout Europe,  
Asia, and Latin America

\* ISO 9001:2008  
Registered Quality Management System

